


# Klemsan®



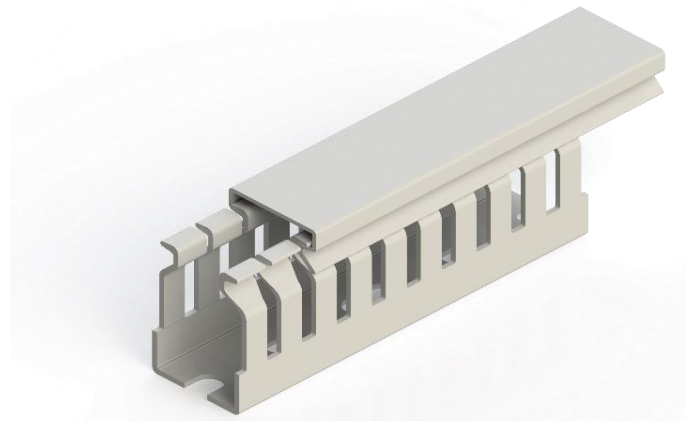


## KHF 2540

Order		
RAL 7035 - Light Grey	Thin Slot (4-6)	540 020

Dimensions	
Length	2.000,00 mm
Width	25,00 mm
Height w/o cover	36,80 mm
Height w/ cover	40,00 mm

Technical Data				
Material	PC-ABS		Package Qty.	50 pcs. x 2 mt.
Inflammability	UL 94 V0		Wire Fill Capacity	60%
Service Temp.	-25°C / +90°C		Fill Amount (14 AWG)	33

Certifications	
For more information about halogen free ducts check our brochure!	
<b>Certificate</b>	<b>Standard</b>
CE	EN 50085-2-3
RoHS	IEC EN 63000
Fire Protection	EN 45545-2 (R22/R23 HL3)
Zero Halogen	DIN VDE 472/815
cURus	UL 1565-CSA C22.2 NO:18.5-02

Accessories				
Description	Type	Colour	Cat. No.	Qty.
Duct Cutter (Scissor)	KKMR		553230	1
Duct Cutter	KMK 1002		553220	1
Cable Duct Cover	HFK 25	RAL 7035	540600	10 pcs. x 2 mt.
Rivet Setting Tool	SETR	Black	553500	1
Plastic Rivet 6,5 mm	PPE 6,5	Grey	553600	100
Cable Holder	KKM	Black	553415	10