


# Klemsan®





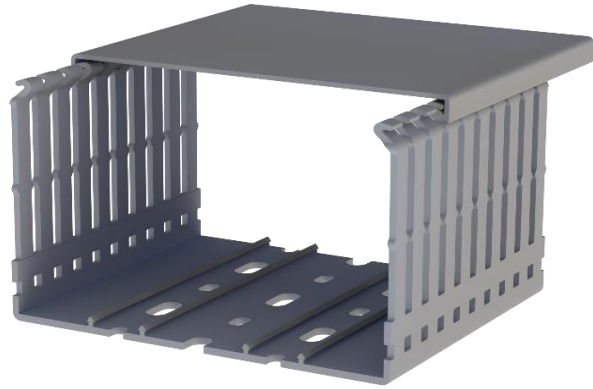

## KKD 1208

Order		
RAL 7030 - Stone Grey	Thin Slot (4-6)	555 1208

Dimensions	
Length	2.000,00 mm
Width	120,00 mm
Height w/o cover	77,60 mm
Height w/ cover	80,00 mm

Technical Data				
Material	PVC		Package Qty.	6 pcs. x 2 mt.
Inflammability	UL 94 V0		Wire Fill Capacity	60%
Max. Service Temp.	60°C		Min. Service Temp.	-15°C

Certifications				
<b>Certificate</b>	<b>Standard</b>			
CE	EN 50085-2-3	 	 	
TSE	TS EN 50085-2-3			
EAC	GOST R 53313:2009			
cULus	UL 1565-C22.2No.18.5-02			

Accessories				
Description	Type	Colour	Cat. No.	Qty.
Duct Cutter (Scissor)	KKMR		553230	1
Duct Cutter	KMK 1002		553220	1
Cable Duct Cover	KDK 120	RAL 7030	551055	10 pcs. x 2 mt.
Rivet Setting Tool	SETR	Black	553500	1
Plastic Rivet 6,5 mm	PPE 6,5	Grey	553600	100
Cable Clamp	KKB	Black	553405	10
Wire Retainer	KKT 1208	Black	553475	10
Cable Holder	KKM	Black	553415	10