


TERMINAL BLOCKS > SCREW TYPE TERMINAL BLOCKS > GROUNDING TERMINALS

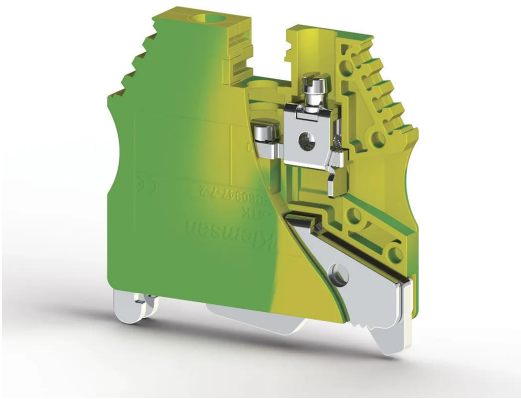

AVK 2,5-4TK Yellow-Green

Stock Keeping Unit (SKU): 334450

Screw Type, 2,5/4 mm² grounding terminal block

Commercial Information

Product Sales Code	334450
Package Unit	50 pcs.
Customs Tariff Number	853690950000
Weight Per Unit Including Packaging	0.02 kg.

Technical Information

PRODUCT FEATURES	
Number of Connections	2
Color	Yellow/Green
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Protective Conductor Type	PE
Connection According to Standard	IEC 60947-7-2
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

Note

**DIN raylarının akim tasima kapasitesine dikkat edilmeli.
Observe the current carrying capacity of the DIN rails.**

ELECTRICAL FEATURES

Nominal Impulse Voltage **8 Kv**

CONNECTION DATA

Connection Type **Screw Connection**

Single-core min. conductor cross-section **0,2 mm²**

Single-core max. conductor cross-section **6 mm²**

Conductor Cross Section Awgkcmil Min **24 AWG**

Conductor Cross Section Awgkcmil Min **kcmil**

Conductor Cross Section Awgkcmil Max **10 AWG**

Multi-core min. conductor cross-section **0,2 mm²**

Multi-core max. conductor cross-section **6 mm²**

Multi-core min. conductor cross-section with ferrule **0,25 mm²**

Multi-core max. conductor cross-section with ferrule **4 mm²**

2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min **0,5 mm²**

2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max **2,5 mm²**

Min. Stripping Length **9 mm**

Max. Stripping Length **10 mm**

Internal cylindrical indicator **A4**

Tightening Torque Min **0,5 Nm**

Tightening Torque Max **0,8 Nm**

Rail Tightening Torque Min **0,4 Nm**

Rail Tightening Torque Max **0,6 Nm**

DIMENSIONS

Width **6 mm**

Length **42 mm**

Height Mr 35X75 **44,50 mm**

Height MR 35x15

52,0 mm
