


TERMINAL BLOCKS > SCREW TYPE TERMINAL BLOCKS > GROUNDING TERMINALS

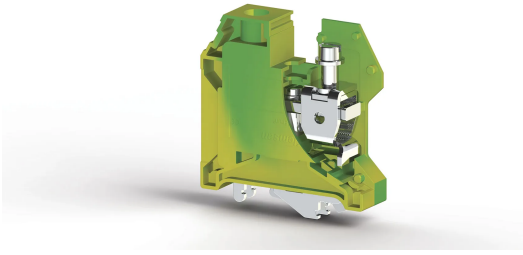

AVK 35 TIRDS Yellow/Green

Stock Keeping Unit (SKU): 334250

Screw Type, 35 mm² grounding terminal block

Commercial Information

Product Sales Code	334250
Package Unit	25 pcs.
Customs Tariff Number	853690950000
Weight Per Unit Including Packaging	0.1016 kg.

Technical Information

PRODUCT FEATURES	
Number of Connections	2
Color	Grey
Number of Levels	1
Protective Conductor Type	PE
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C
Note	DIN raylarının akım tasama kapasitesine dikkat edilmelidir. / Observe the current carrying capacity of the DIN rails.

ELECTRICAL FEATURES

Nominal Impulse Voltage	8 Kv
-------------------------	-------------

CONNECTION DATA

Connection Type	Screw Connection
Single-core min. conductor cross-section	6 mm²
Single-core max. conductor cross-section	50 mm²
Conductor Cross Section Awgkcmil Min	10 AWG
Conductor Cross Section Awgkcmil Max	2 AWG
Multi-core min. conductor cross-section	6 mm²
Multi-core max. conductor cross-section	35 mm²
Multi-core min. conductor cross-section with ferrule	6 mm²
Multi-core max. conductor cross-section with ferrule	35 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	4 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	16 mm²
Min. Stripping Length	16 mm
Max. Stripping Length	18 mm
Internal cylindrical indicator	B9
Tightening Torque Min	4 Nm
Tightening Torque Max	6 Nm
Rail Tightening Torque Min	1,2 Nm
Rail Tightening Torque Max	1,5 Nm

DIMENSIONS

Width	16 mm
Length	62 mm
Height Mr 35X75	68,10 mm
Height MR 35x15	75,60 mm
Height Mr 32	72,70 mm