


Kare Flanşlı Priz (D38999/20)

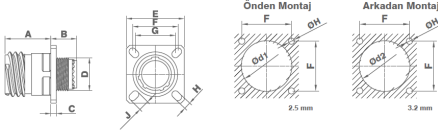

Göçde	A (mm)	B (mm)	C (mm)	D Ölç.	E	F	G	H	J	d1 (mm)	d2 (mm)
09	20,90	10,60	2,50	M12*1-6g	23,90	18,26	15,09	3,25	5,49	10,66	13,11
11	20,90	10,60	2,50	M15*1-6g	26,50	20,62	18,06	3,25	4,93	20,22	15,88
13	20,90	10,60	2,50	M18*1-6g	28,60	23,01	20,62	3,25	4,93	23,42	19,05
15	20,90	10,60	2,50	M20*1-6g	31,60	24,61	23,01	3,25	4,29	26,59	23,01
17	20,90	10,60	2,50	M25*1-6g	33,30	26,97	24,61	3,25	4,93	30,96	25,81
19	20,90	10,60	2,50	M28*1-6g	36,50	29,36	26,97	3,25	4,93	32,94	28,98
21	20,10	11,40	3,20	M30*1-6g	39,70	31,75	29,36	3,25	4,93	36,12	32,16
23	20,10	11,40	3,20	M34*1-6g	42,90	34,93	31,75	3,91	6,15	39,29	34,93
25	20,10	11,40	3,20	M37*1-6g	46,00	38,10	34,93	3,91	6,15	42,47	37,69

CONNECTORS > MIL-DTL-38999 > SERIES III

D38999/20WJ35SE

Stock Keeping Unit (SKU): 930WJ35SE

Wall mount flange type receptacle

Commercial Information

Product Sales Code	930WJ35SE
Package Unit	1 pcs.

Technical Information

PRODUCT FEATURES	
Continuous Operating Temperature max.	175 °C
Continuous Operating Temperature min.	65 °C
Features	MIL-DTL-38999
Connector Type	Wall Mounted Socket
Housing Size	25(J)
Number Of Contacts	128 Ad.
Placement	j-35
Housing Material	Aluminium
Housing Color	Khaki Green
Housing Coating	Cadmium
Contact Type	Socket (128#22)
Wire Gauge	28,26,24,22 AWG
Contact Material	Au/Cu
Ingress Protection	IP67
Sealing Material	Silicon
Emi Shielding	+

Mating Cycles	500
Polarization	E
Service Rating	M

ELECTRICAL FEATURES

Nominal Current	5 A
Operating Voltage Ac V Rms Max	1000V AC/DC
