


TERMINAL BLOCKS > PUSH-IN TYPE TERMINAL BLOCKS > FEED THROUGH
TERMINALS

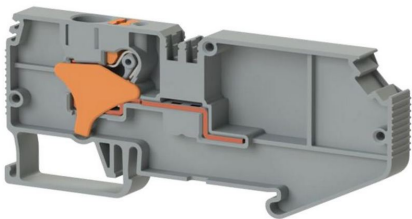

DS 6F K1 GREY

Stock Keeping Unit (SKU): 328899

6 mm² single-phase single-pole main line terminal block.

Commercial Information

Product Sales Code	328899
Package Unit	16 pcs.
Customs Tariff Number	853690950000

Technical Information

PRODUCT SPECIFICATIONS	
Number of Connections	1
Color	grey
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V0
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature Max.	130 °C
Continuous Operating Temperature Min.	-60 °C

ELECTRICAL SPECIFICATIONS	
---------------------------	--

Nominal Impulse Voltage	6 Kv
Nominal Current	41 A (at 6 mm²) A
Nominal Voltage	500 V
Maximum Load Current	57 A (with 10 mm² conductor cross section) A

CONNECTION DATA	
Connection Type	Push-In
Min. Solid Conductor Cross-Sectional Area	0,2 mm²
Max. Solid Conductor Cross-Sectional Area	10 mm²
Conductor Cross-Section AWG/kcmil Min.	24 AWG
Conductor Cross-Section AWG/kcmil Max.	8 AWG
Min. Stranded Conductor Cross-Sectional Area	0,2 mm²
Max. Stranded Conductor Cross-Sectional Area	6 mm²
Min. Stranded Conductor Cross-Sectional Area with Ferrule	0,25 mm²
Max. Stranded Conductor Cross-Sectional Area with Ferrule	6 mm²
Min. Stripping Length	10 mm
Max. Stripping Length	12 mm
Internal Cylindrical Indicator	A5

DIMENSIONS	
Width	8,0 mm
Length	90,40 mm
Height MR 35x7.5	41,95 mm
Height MR 35x15	49,45 mm