


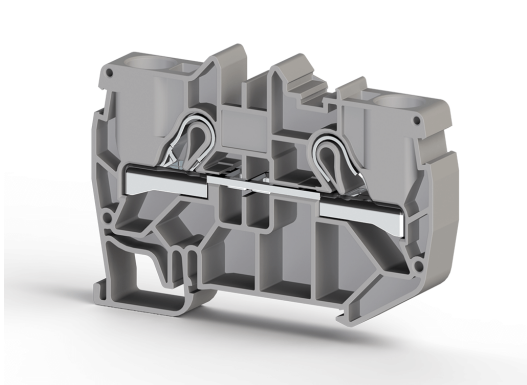

TERMINAL BLOCKS > PUSH-IN TYPE TERMINAL BLOCKS > FEED THROUGH  
TERMINALS

PYK 10 GREY

Stock Keeping Unit (SKU): 307139

10 mm² push-in two-pole terminal block

Commercial Information

|                                     |              |
|-------------------------------------|--------------|
| Product Sales Code                  | 307139       |
| Package Unit                        | 50 pcs.      |
| Customs Tariff Number               | 853690950000 |
| Weight Per Unit Including Packaging | 0.02294 kg.  |

Technical Information

| PRODUCT SPECIFICATIONS                |               |
|---------------------------------------|---------------|
| Number of Connections                 | 2             |
| Number of Levels                      | 1             |
| Insulation Material                   | PA            |
| UL 94 Flammability Class              | V2            |
| Impulse Voltage Category              | III           |
| Insulation Material Group             | I             |
| Pollution Degree                      | 3             |
| Connection According to Standard      | IEC 60947-7-1 |
| Continuous Operating Temperature Max. | 120 °C        |
| Continuous Operating Temperature Min. | -55 °C        |
| ELECTRICAL SPECIFICATIONS             |               |
| Nominal Impulse Voltage               | 8 Kv          |
| Nominal Voltage                       | 800 V         |

|                             |      |
|-----------------------------|------|
| Maximum Load Current        | 76 A |
| Nominal Current (In / Fuse) | 57 A |

CONNECTION DATA

|                                                                                             |                    |
|---------------------------------------------------------------------------------------------|--------------------|
| Connection Type                                                                             | Push-In Connection |
| Min. Solid Conductor Cross-Sectional Area                                                   | 0,5 mm²            |
| Max. Solid Conductor Cross-Sectional Area                                                   | 16 mm²             |
| Conductor Cross-Section AWG/kcmil Min.                                                      | 20 AWG             |
| Conductor Cross-Section AWG/kcmil Max.                                                      | 6 AWG              |
| Min. Stranded Conductor Cross-Sectional Area                                                | 0,5 mm²            |
| Max. Stranded Conductor Cross-Sectional Area                                                | 10 mm²             |
| Min. Stranded Conductor Cross-Sectional Area with Ferrule                                   | 0,5 mm²            |
| Max. Stranded Conductor Cross-Sectional Area with Ferrule                                   | 10 mm²             |
| Max. for 2 Stranded Conductors of the Same Cross-Section with Plastic-Collared Twin Ferrule | 4 mm²              |
| Min. Stripping Length                                                                       | 13 mm              |
| Max. Stripping Length                                                                       | 15 mm              |
| Internal Cylindrical Indicator                                                              | B6                 |

DIMENSIONS

|                  |         |
|------------------|---------|
| Width            | 10 mm   |
| Length           | 75,4 mm |
| Height MR 35x7.5 | 52 mm   |
| Height MR 35x15  | 59,5 mm |

Certificates

  
CSA

  
cULus

  
VDE

  
ATEX

  
CE

UK  
CA

UKCA

EAC

EAC



CSA

|                         |          |
|-------------------------|----------|
| Conductor Cross-section | AWG 20-6 |
| Nominal Current         | 55 A     |
| Nominal Voltage         | 600 A    |



cULus

|                 |       |
|-----------------|-------|
| Nominal Current | 50 A  |
| Nominal Voltage | 800 V |

## Accessories

### END STOP



Product Code: 495049

**KD 3 Grey**

Product Code: 495059

**KD 4 Grey**

Product Code: 495219

**KD 7 Grey**

### ZINC COATED



Product Code: 500601

**MR 35x7.5 Straight (1m) Zinc Coated Rail**

Product Code: 500602

**MR 35x7.5 Slotted (1m) Zinc Coated Rail**

Product Code: 500606

**MR 35x15 Straight (1m) Zinc Coated Rail**

### ÇINKO KAPLI



Product Code: 500607

**MR 35x15 Slotlu (1m) Çinko Kaplı Ray**

### END PLATE/COVER



Product Code: 446470

**NPP/PYK 10 Beige**



Product Code: 446479

**NPP/PYK 10 Grey**

#### SEPARATION PLATE



Product Code: 463200

**APP/PYK 10 Grey**



Product Code: 463209

**APP/PYK 10 Beige**

#### PLUG-IN CROSS CONNECTOR

Product Code: 476252

**UK 10/2**

Product Code: 476253

**UK 10/3**

Product Code: 476254

**UK 10/4**

Product Code: 476259

**UK 10/10**

#### TERMINAL STRIP LABELS



Product Code: 1020100

**SLF-P1 W 11,2mm x 15m**