


TERMINAL BLOCKS > PUSH-IN TYPE TERMINAL BLOCKS > GROUNDING TERMINALS

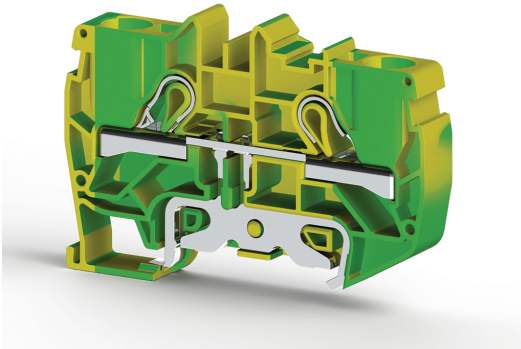

PYK 10T

Stock Keeping Unit (SKU): 336530

Push-in Type, 10 mm² grounding terminal block

Commercial Information

Product Sales Code	336530
Package Unit	25 pcs.
Customs Tariff Number	853690950000
Weight Per Unit Including Packaging	0.0352 kg.

Technical Information

PRODUCT FEATURES

Number of Connections	2
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-2
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

ELECTRICAL FEATURES

Nominal Impulse Voltage	8 Kv
-------------------------	-------------

CONNECTION DATA

Connection Type	Push-In Connection
Single-core min. conductor cross-section	0,5 mm²
Single-core max. conductor cross-section	16 mm²
Conductor Cross Section Awgkcmil Min	20 AWG
Conductor Cross Section Awgkcmil Max	6 AWG
Multi-core min. conductor cross-section	0,5 mm²
Multi-core max. conductor cross-section	10 mm²
Multi-core min. conductor cross-section with ferrule	0,5 mm²
Multi-core max. conductor cross-section with ferrule	10 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	4 mm²
Min. Stripping Length	13 mm
Max. Stripping Length	15 mm
Internal cylindrical indicator	B6

DIMENSIONS

Width	10 mm
Length	75,4 mm
Height Mr 35X75	52 mm
Height MR 35x15	59,5 mm