


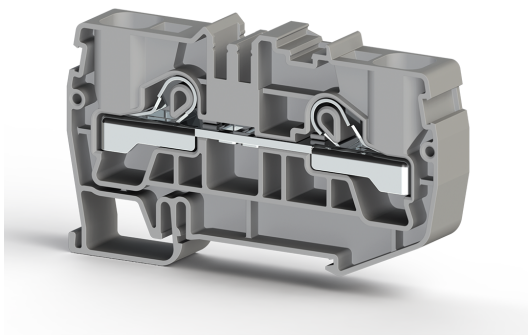

TERMINAL BLOCKS > PUSH-IN TYPE TERMINAL BLOCKS > FEED THROUGH
TERMINALS

PYK 16 GREY

Stock Keeping Unit (SKU): 307659

Push-in Type, 16 mm² feed-through terminal block

Commercial Information

Product Sales Code	307659
Package Unit	30 pcs.
Customs Tariff Number	853690950000
Weight Per Unit Including Packaging	0.0311 kg.

Technical Information

PRODUCT SPECIFICATIONS	
Number of Connections	2
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature Max.	120 °C
Continuous Operating Temperature Min.	-55 °C
ELECTRICAL SPECIFICATIONS	
Nominal Impulse Voltage	8 Kv
Nominal Current	76 A

Nominal Voltage	1000 V
Maximum Load Current	85 A
Nominal Current (In / Fuse)	76 A

CONNECTION DATA

Connection Type	Push-In Connection
Min. Solid Conductor Cross-Sectional Area	0,5 mm²
Max. Solid Conductor Cross-Sectional Area	25 mm²
Conductor Cross-Section AWG/kcmil Min.	20 AWG
Conductor Cross-Section AWG/kcmil Max.	4 AWG
Min. Stranded Conductor Cross-Sectional Area	0,5 mm²
Max. Stranded Conductor Cross-Sectional Area	16 mm²
Min. Stranded Conductor Cross-Sectional Area with Ferrule	0,5 mm²
Max. Stranded Conductor Cross-Sectional Area with Ferrule	16 mm²
Max. for 2 Stranded Conductors of the Same Cross-Section with Plastic-Collared Twin Ferrule	4 mm²
Min. Stripping Length	16 mm
Max. Stripping Length	18 mm
Internal Cylindrical Indicator	B7

DIMENSIONS

Width	12 mm
Length	81,45 mm
Height MR 35x7.5	49,50 mm
Height MR 35x15	57,00 mm