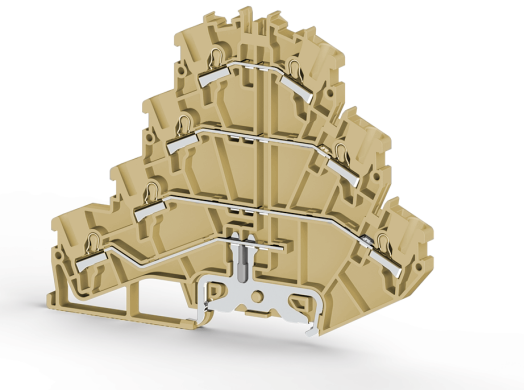

TERMINAL BLOCKS > PUSH-IN TYPE TERMINAL BLOCKS > MULTILEVEL TERMINALS

PYK 2,5-3FT Beige

Stock Keeping Unit (SKU): 307200

Push-in Type, 2,5 mm² 4 layer terminal block (3 phase and ground) (beige)

Commercial Information

Product Sales Code	**307200**
Package Unit	**30 pcs.**
Customs Tariff Number	**853690950000**
Weight Per Unit Including Packaging	**0.03133 kg.**

Technical Information

PRODUCT SPECIFICATIONS	
Number of Connections	**7**
Color	**Beige**
Number of Levels	**4**
Protective Conductor Type	**PE**
Insulation Material	**PA**
UL 94 Flammability Class	**V2**
Impulse Voltage Category	**III**
Insulation Material Group	**I**
Pollution Degree	**3**
Connection According to Standard	**IEC-60947-7-1**
Continuous Operating Temperature Max.	**120 °C**
Continuous Operating Temperature Min.	**-55 °C**

ELECTRICAL SPECIFICATIONS	
Nominal Impulse Voltage	**6 Kv**
Nominal Current	**24 A**
Nominal Voltage	**500 V**
Maximum Load Current	**32 A**

CONNECTION DATA	
Connection Type	**Push-In Connection**
Min. Solid Conductor Cross-Sectional Area	**0,34 mm²**
Max. Solid Conductor Cross-Sectional Area	**4 mm²**
Conductor Cross-Section AWG/kcmil Min.	**22 AWG**
Conductor Cross-Section AWG/kcmil Max.	**12 AWG**
Min. Stranded Conductor Cross-Sectional Area	**0,34 mm²**
Max. Stranded Conductor Cross-Sectional Area	**2,5 mm²**
Min. Stranded Conductor Cross-Sectional Area with Ferrule	**0,25 mm²**
Max. Stranded Conductor Cross-Sectional Area with Ferrule	**2,5 mm²**
Max. for 2 Stranded Conductors of the Same Cross-Section with Plastic-Collared Twin Ferrule	**0,5 mm²**
Min. Stripping Length	**9 mm**
Max. Stripping Length	**10 mm**
Internal Cylindrical Indicator	**A3**

DIMENSIONS	
Width	**5 mm**
Length	**118,6 mm**
Height MR 35x7.5	**93 mm**
Height MR 35x15	**100,5 mm**

Certificates

CSA | cULus | VDE | ATEX | CE

ROHS | UKCA

CSA	
Conductor Cross-section	AWG 22-12
Nominal Current	20 A
Nominal Voltage	300 V

cULus	
Nominal Current	18 A
Nominal Voltage	400 V

Accessories

END STOP



Product Code: 495049

KD 3 Grey



Product Code: 495059

KD 4 Grey



Product Code: 495219

KD 7 Grey

ZINC COATED



Product Code: 500601

MR 35x7.5 Straight (1m) Zinc Coated Rail



Product Code: 500604

MR 35x7.5 Slotted DIN Rail (2 m), Galvanized



Product Code: 500609

MR 35x15 Slotted (2m) Zinc Coated Rail



Product Code: 500602

MR 35x7.5 Slotted (1m) Zinc Coated Rail



Product Code: 500603

MR 35x7.5 Straight (2m) Zinc Coated Rail



Product Code: 500606

MR 35x15 Straight (1m) Zinc Coated Rail



Product Code: 500608

MR 35x15 Straight (2m) Zinc Coated Rail

ÇINKO KAPLI



Product Code: 500607

MR 35x15 Slotlu (1m) Çinko Kaplı Ray

GALVANIZED



Product Code: 500602E

MR 35x7.5 Slotted (1m) Rail (Galvanized)



Product Code: 500603E

MR 35x7,5 Plain (2m) Rail (Galvanized)



Product Code: 500604E

MR 35x7,5 SLOT (2m) RAIL (GALVANIZED)



Product Code: 500609E

MR 35x15 Slotted (2m) Rail (Galvanized)

SCREWDRIVERS



Product Code: 561130

KT-D 1 (0,4 x Ø2,5)

TERMINAL THERMAL PRINTER LABELS



Product Code: 811750

D-NS 5x10

TERMINAL BLOCKS

Product Code: 505310

DG 10/5

Product Code: 505380

DG 10/5T

END PLATE/COVER



Product Code: 446530

NPP/PYK 2,5-3FT Beige



Product Code: 446539

NPP/PYK 2,5-3FT Grey

PLUG-IN CROSS CONNECTOR



Product Code: 476222

UK 2,5/2



Product Code: 476223

UK 2,5/3



Product Code: 476224

UK 2,5/4



Product Code: 476229

UK 2,5/10

Product Code: 474200

UK 2,5/20

TERMINAL STRIP LABELS

Product Code: 1020100

SLF-P1 W 11,2mm x 15m