


TERMINAL BLOCKS > PUSH-IN TYPE TERMINAL BLOCKS > MULTILEVEL TERMINALS

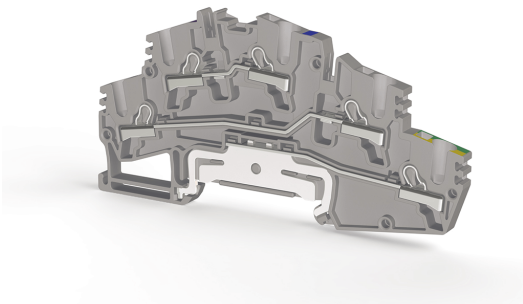

PYK 2,5-M2FT Grey

Stock Keeping Unit (SKU): 307709

Push-in Terminal, 2,5 mm² 2 layer compact (mini) terminal block (with ground)

Commercial Information

Product Sales Code	307709
Package Unit	30 pcs.
Customs Tariff Number	853690950000
Weight Per Unit Including Packaging	0.019466 kg.

Technical Information

PRODUCT FEATURES	
Number of Connections	5
Color	Grey
Number of Levels	3
Protective Conductor Type	PE
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC-60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

ELECTRICAL FEATURES

Nominal Impulse Voltage	6 Kv
Nominal Current	24 A
Nominal Voltage	250 V
Maximum Load Current	32 A

CONNECTION DATA

Connection Type	Push-In Connection
Single-core min. conductor cross-section	0,34 mm²
Single-core max. conductor cross-section	4 mm²
Conductor Cross Section Awgkcmil Min	22 AWG
Conductor Cross Section Awgkcmil Max	12 AWG
Multi-core min. conductor cross-section	0,34 mm²
Multi-core max. conductor cross-section	2,5 mm²
Multi-core min. conductor cross-section with ferrule	0,25 mm²
Multi-core max. conductor cross-section with ferrule	2,5 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	0,5 mm²
Min. Stripping Length	9 mm
Max. Stripping Length	10 mm
Internal cylindrical indicator	A3

DIMENSIONS

Width	5 mm
Length	96,7 mm
Height Mr 35X75	50,1 mm
Height MR 35x15	57,6 mm