


TERMINAL BLOCKS > PUSH-IN TYPE TERMINAL BLOCKS > GROUNDING TERMINALS

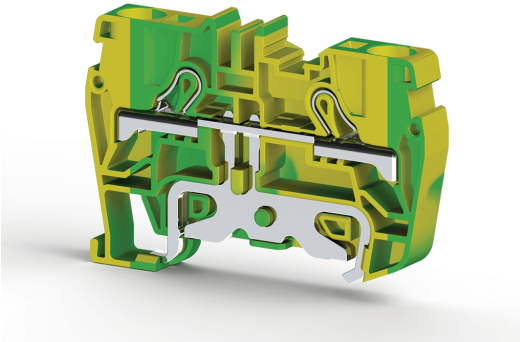

## PYK 6T

**Stock Keeping Unit (SKU):** 336520

*Push-in Type, 6 mm<sup>2</sup> grounding terminal block*

### Commercial Information

|                                     |                     |
|-------------------------------------|---------------------|
| Product Sales Code                  | <b>336520</b>       |
| Package Unit                        | <b>60 pcs.</b>      |
| Customs Tariff Number               | <b>853690950000</b> |
| Weight Per Unit Including Packaging | <b>0.02233 kg.</b>  |

### Technical Information

#### PRODUCT FEATURES

|                                       |                      |
|---------------------------------------|----------------------|
| Number of Connections                 | <b>2</b>             |
| Color                                 | <b>Yellow-Green</b>  |
| Number of Levels                      | <b>1</b>             |
| Protective Conductor Type             | <b>PE</b>            |
| Insulation Material                   | <b>PA</b>            |
| UL 94 Flammability Class              | <b>V2</b>            |
| Impulse Voltage Category              | <b>III</b>           |
| Insulation Material Group             | <b>I</b>             |
| Pollution Degree                      | <b>3</b>             |
| Connection According to Standard      | <b>IEC 60947-7-2</b> |
| Continuous Operating Temperature max. | <b>120 °C</b>        |
| Continuous Operating Temperature min. | <b>-55 °C</b>        |

#### ELECTRICAL FEATURES

|                         |             |
|-------------------------|-------------|
| Nominal Impulse Voltage | <b>8 Kv</b> |
|-------------------------|-------------|

## CONNECTION DATA

|  |                           |
|--|---------------------------|
| Connection Type  | <b>Push-In Connection</b> |
| Single-core min. conductor cross-section   | <b>0,5 mm<sup>2</sup></b> |
| Single-core max. conductor cross-section   | <b>10 mm<sup>2</sup></b>  |
| Conductor Cross Section Awgkcmil Min   | <b>20 AWG</b>             |
| Conductor Cross Section Awgkcmil Max   | <b>8 AWG</b>              |
| Multi-core min. conductor cross-section  | <b>0,5 mm<sup>2</sup></b> |
| Multi-core max. conductor cross-section  | <b>6 mm<sup>2</sup></b>   |
| Multi-core min. conductor cross-section with ferrule                               | <b>0,5 mm<sup>2</sup></b> |
| Multi-core max. conductor cross-section with ferrule                               | <b>6 mm<sup>2</sup></b>   |
| Min. Stripping Length  | <b>11 mm</b>              |
| Max. Stripping Length  | <b>13 mm</b>              |
| Internal cylindrical indicator   | <b>A5</b>                 |
| 2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve | <b>1,5 mm<sup>2</sup></b> |

## DIMENSIONS

|                 |                |
|-----------------|----------------|
| Width           | <b>8 mm</b>    |
| Length          | <b>65,6 mm</b> |
| Height Mr 35X75 | <b>46,2 mm</b> |
| Height MR 35x15 | <b>53,7 mm</b> |