


TERMINAL BLOCKS > SPRING CLAMP TYPE TERMINAL BLOCKS > FEED THROUGH TERMINALS

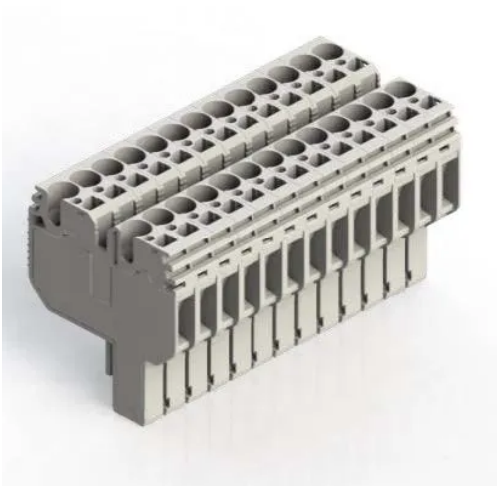

SG-PT 2,5DB/13 Grey

Stock Keeping Unit (SKU): 310689

Socket Type, 2,5 mm² terminal block (suitable for StoP Series)

Commercial Information

Product Sales Code	310689
Package Unit	10 pcs.
Customs Tariff Number	853690950000
Weight Per Unit Including Packaging	0.072 kg.

Technical Information

PRODUCT FEATURES	
Number of Connections	13
Color	Grey
Number of Levels	2
Insulation Material	PA
UL 94 Flammability Class	V0
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 61984/IEC 60947-7-1
Fire Protection In Railway Vehicles Din En 45545 2 R22 R23 R24 R26	HL 1 - HL 2 - HL 3
Continuous Operating Temperature max.	130 °C

Continuous Operating Temperature min.	-60 °C
---------------------------------------	---------------

ELECTRICAL FEATURES

Nominal Impulse Voltage	6 Kv
-------------------------	-------------

Nominal Current	24 A
-----------------	-------------

Nominal Voltage	500 V
-----------------	--------------

Maximum Load Current	24 A
----------------------	-------------

CONNECTION DATA

Connection Type	Spring Connection
-----------------	--------------------------

Single-core min. conductor cross-section	0,08 mm²
--	----------------------------

Single-core max. conductor cross-section	4 mm²
--	-------------------------

Conductor Cross Section Awgkcmil Min	28 AWG
--------------------------------------	---------------

Conductor Cross Section Awgkcmil Max	12 AWG
--------------------------------------	---------------

Multi-core min. conductor cross-section	0,14 mm²
---	----------------------------

Multi-core max. conductor cross-section	2,5 mm²
---	---------------------------

Multi-core min. conductor cross-section with ferrule	0,14 mm²
--	----------------------------

Multi-core max. conductor cross-section with ferrule	2,5 mm²
--	---------------------------

2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	0,5 mm²
--	---------------------------

Min. Stripping Length	8 mm
-----------------------	-------------

Max. Stripping Length	10 mm
-----------------------	--------------

Internal cylindrical indicator	A3
--------------------------------	-----------

DIMENSIONS

Width	67,6 mm
-------	----------------

Length	34,60 mm
--------	-----------------

Height	41,90 mm
--------	-----------------