


TERMINAL BLOCKS > SCREW TYPE TERMINAL BLOCKS > TRANSFORMER TERMINAL BLOCKS

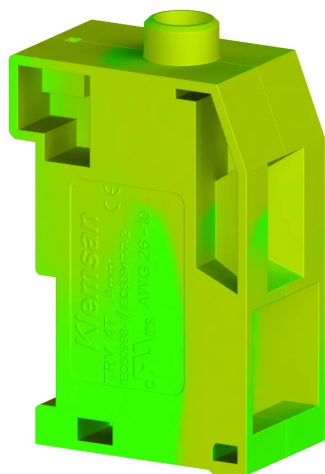

## TRV 4T Yellow-Green

**Stock Keeping Unit (SKU):** 422060

*4mm<sup>2</sup> Transformer Grounding Terminal Block*

### Commercial Information

Product Sales Code	<b>422060</b>
Package Unit	<b>50 pcs.</b>
Customs Tariff Number	<b>853690950000</b>
Weight Per Unit Including Packaging	<b>0.00772 kg.</b>

### Technical Information

PRODUCT FEATURES	
Number of Connections	<b>2</b>
Color	<b>Yellow/Green</b>
Number of Levels	<b>1</b>
Insulation Material	<b>PA</b>
UL 94 Flammability Class	<b>V2</b>
Impulse Voltage Category	<b>III</b>
Insulation Material Group	<b>I</b>
Pollution Degree	<b>3</b>
Connection According to Standard	<b>IEC60998-1 / 61558-1</b>
Continuous Operating Temperature max.	<b>120 °C</b>
Continuous Operating Temperature min.	<b>-55 °C</b>

## ELECTRICAL FEATURES

Nominal Impulse Voltage	<b>8 Kv</b>
-------------------------	-------------

## CONNECTION DATA

Connection Type	<b>Screw Connection</b>
-----------------	-------------------------

Single-core min. conductor cross-section	<b>0,2 mm<sup>2</sup></b>
--	---------------------------

Single-core max. conductor cross-section	<b>6 mm<sup>2</sup></b>
--	-------------------------

Conductor Cross Section Awgkcmil Min	<b>24 AWG</b>
--------------------------------------	---------------

Conductor Cross Section Awgkcmil Max	<b>10 AWG</b>
--------------------------------------	---------------

Multi-core min. conductor cross-section	<b>0,2 mm<sup>2</sup></b>
---	---------------------------

Multi-core max. conductor cross-section	<b>6 mm<sup>2</sup></b>
---	-------------------------

Multi-core min. conductor cross-section with ferrule	<b>0,25 mm<sup>2</sup></b>
--	----------------------------

Multi-core max. conductor cross-section with ferrule	<b>4 mm<sup>2</sup></b>
--	-------------------------

2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	<b>0,5 mm<sup>2</sup></b>
--	---------------------------

2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	<b>2,5 mm<sup>2</sup></b>
--	---------------------------

Min. Stripping Length	<b>9 mm</b>
-----------------------	-------------

Max. Stripping Length	<b>10 mm</b>
-----------------------	--------------

Internal cylindrical indicator	<b>B4</b>
--------------------------------	-----------

Tightening Torque Min	<b>0,5 Nm</b>
-----------------------	---------------

Tightening Torque Max	<b>0,8 Nm</b>
-----------------------	---------------

## DIMENSIONS

Width	<b>12 mm</b>
-------	--------------

Length	<b>20,90 mm</b>
--------	-----------------

Height	<b>34,00 mm</b>
--------	-----------------