


Kare Flanşlı Priz (D38999/20)

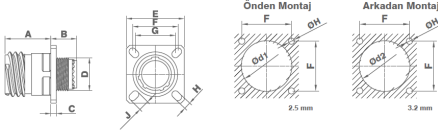

Göçde	A (mm)	B (mm)	C (mm)	D (mm)	E	F	G	H	J	d1 (mm)	d2 (mm)
09	20.90	10.60	2.50	M12*1-6g	23.90	18.26	15.09	3.25	5.49	16.66	13.11
11	20.90	10.60	2.50	M15*1-6g	26.50	20.62	18.06	3.25	4.93	20.22	15.88
13	20.90	10.60	2.50	M18*1-6g	28.60	23.01	20.62	3.25	4.93	23.42	19.05
15	20.90	10.60	2.50	M20*1-6g	31.00	24.61	23.01	3.25	4.29	26.58	23.01
17	20.90	10.60	2.50	M25*1-6g	33.30	26.97	24.61	3.25	4.93	30.96	25.81
19	20.90	10.60	2.50	M28*1-6g	36.50	29.36	26.97	3.25	4.93	32.94	28.98
21	20.10	11.40	3.20	M31*1-6g	39.70	31.75	29.36	3.25	4.93	36.12	32.16
23	20.10	11.40	3.20	M34*1-6g	42.90	34.93	31.75	3.91	6.15	39.29	34.93
25	20.10	11.40	3.20	M37*1-6g	46.00	38.10	34.93	3.91	6.15	42.47	37.69

СОЕДИНИТЕЛИ > MIL-DTL-38999 (СТАНДАРТ) > СЕРИЯ III

D38999/20WJ35SE

Артикул (SKU): 930WJ35SE

Розетка с фланцевым креплением на стену

Коммерческая информация

Код продажи продукта	930WJ35SE
Единица Упаковки	1 шт.

Техническая информация

PRODUCT FEATURES	
Continuous Operating Temperature max.	175 °C
Continuous Operating Temperature min.	65 °C
Features	MIL-DTL-38999
Connector Type	Wall Mounted Socket
Housing Size	25(J)
Number Of Contacts	128 Ad.
Placement	j-35
Housing Material	Aluminium
Housing Color	Khaki Green
Housing Coating	Cadmium
Contact Type	Socket (128#22)
Wire Gauge	28,26,24,22 AWG
Contact Material	Au/Cu
Ingress Protection	IP67
Sealing Material	Silicon
Emi Shielding	+

Mating Cycles	500
Polarization	E
Service Rating	M

ELECTRICAL FEATURES

Nominal Current	5 A
Operating Voltage Ac V Rms Max	1000V AC/DC
