


ЭЛЕКТРОННАЯ ПРОДУКЦИЯ > ЭЛЕКТРОННЫЕ МОДУЛИ > ЭЛЕКТРОННЫЕ
КЛЕММНЫЕ БЛОКИ

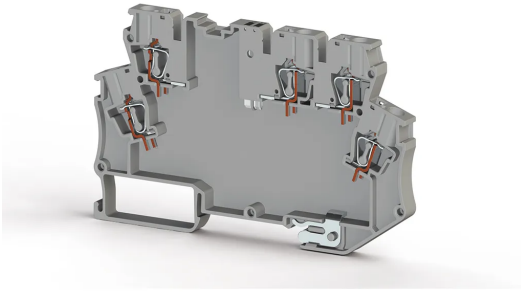

MDB 5E Серый

Артикул (SKU): 327079

Клемма типа Cage Clamp 5-полюсная, одиночная полосовая
этикетка с заземлением (пластиковый корпус)

Коммерческая информация

Код продажи продукта	327079
Единица Упаковки	20 шт.
Номер таможенного тарифа	853630300000
Вес за единицу, включая упаковку	0.017 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	5
Color	Grey
Number of Levels	2
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Protective Conductor Type	PE
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

ELECTRICAL FEATURES

Nominal Impulse Voltage	8 Kv
Nominal Current	32 A
Nominal Voltage	800 V

CONNECTION DATA

Connection Type	Spring Connection
Single-core min. conductor cross-section	0,08 mm²
Single-core max. conductor cross-section	4 mm²
Conductor Cross Section Awgkcmil Min	28 AWG
Conductor Cross Section Awgkcmil Max	12 AWG
Multi-core min. conductor cross-section	0,08 mm²
Multi-core max. conductor cross-section	2,5 mm²
Multi-core min. conductor cross-section with ferrule	0,14 mm²
Multi-core max. conductor cross-section with ferrule	2,5 mm²
Min. Stripping Length	8 mm
Max. Stripping Length	10 mm
Internal cylindrical indicator	A3
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve	0,5 mm²

DIMENSIONS

Width	6,2 mm
Length	100,5 mm
Height Mr 35X75	63,5 mm
Height MR 35x15	71 mm