


КЛЕММНЫЕ БЛОКИ > ВИНТОВЫЕ КЛЕММНЫЕ БЛОКИ > ПРОХОДНЫЕ КЛЕММЫ

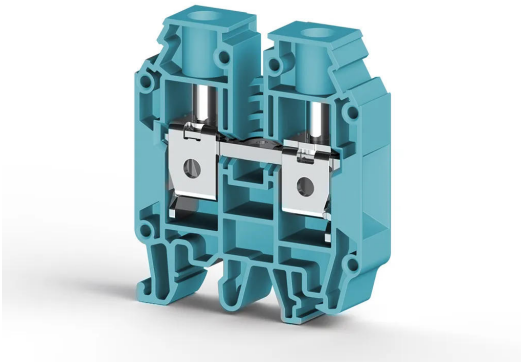

AVK 25 RD Синий

Артикул (SKU): 304291

Винтовая клемма 25 мм² проходная (синяя)

Коммерческая информация

Код продажи продукта	304291
Единица Упаковки	50 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.0368 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	2
Color	Blue
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C
ELECTRICAL FEATURES	
Nominal Impulse Voltage	8 Kv

Nominal Current	101 A
Nominal Voltage	750 V
Maximum Load Current	125 A

CONNECTION DATA

Connection Type	Screw Connection
Single-core min. conductor cross-section	1,5 mm²
Single-core max. conductor cross-section	35 mm²
Conductor Cross Section Awgkcmil Min	16 AWG
Conductor Cross Section Awgkcmil Max	2 AWG
Multi-core min. conductor cross-section	1,5 mm²
Multi-core max. conductor cross-section	35 mm²
Multi-core min. conductor cross-section with ferrule	1,5 mm²
Multi-core max. conductor cross-section with ferrule	25 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	1,5 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	10 mm²
Min. Stripping Length	12 mm
Max. Stripping Length	14 mm
Internal cylindrical indicator	B8
Tightening Torque Min	2 Nm
Tightening Torque Max	3 Nm

DIMENSIONS

Width	12 mm
Length	52,80 mm
Height Mr 35X75	61,10 mm
Height MR 35x15	68,60 mm
Height Mr 32	65,70 mm