


КЛЕММНЫЕ БЛОКИ > КЛЕММНЫЕ КОЛОДКИ С ВСТАВНЫМ КРЕПЛЕНИЕМ > МНОГОПРОВОДНЫЕ КЛЕММНЫЕ БЛОКИ

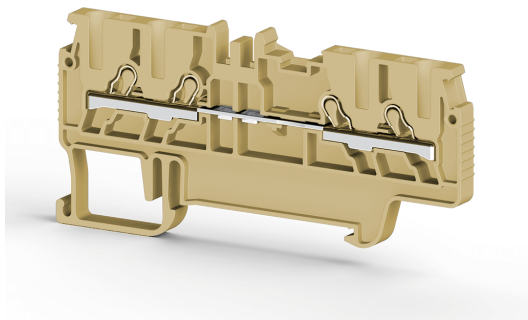

РҮК 1,5МС Бежевый

Артикул (SKU): 307020

Push-In 1,5 мм² 2 вход-2 выход мини проходная

Коммерческая информация

Код продажи продукта	307020
Единица Упаковки	70 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.006 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	4
Color	Beige
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C
ELECTRICAL FEATURES	
Nominal Impulse Voltage	8 Kv

Nominal Current	17,5 A
Nominal Voltage	800 V
Maximum Load Current	24 A

CONNECTION DATA

Connection Type	Push-In Connection
Single-core min. conductor cross-section	0,34 mm²
Single-core max. conductor cross-section	2,5 mm²
Conductor Cross Section Awgkcmil Min	22 AWG
Conductor Cross Section Awgkcmil Max	14 AWG
Multi-core min. conductor cross-section	0,34 mm²
Multi-core max. conductor cross-section	1,5 mm²
Multi-core min. conductor cross-section with ferrule	0,5 mm²
Multi-core max. conductor cross-section with ferrule	1,5 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	0,5 mm²
Min. Stripping Length	9 mm
Max. Stripping Length	10 mm
Internal cylindrical indicator	A1-B1

DIMENSIONS

Width	4,2 mm
Length	75,10 mm
Height Mr 35X75	37,8 mm
Height Mr 15X55	45,3 mm