


КЛЕММНЫЕ БЛОКИ > ВИНТОВЫЕ КЛЕММНЫЕ БЛОКИ > ПРОХОДНЫЕ КЛЕММЫ

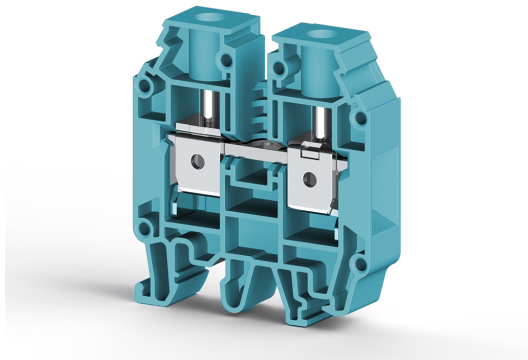

AVK 16 RD СИНИЙ

Артикул (SKU): 304241

Переходная клеммная колодка винтовая 16 мм²

Коммерческая информация

Код продажи продукта	304241
Единица Упаковки	50 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.03176 kg.

Техническая информация

PRODUCT FEATURES

Number of Connections	2
Color	Mavi
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

ELECTRICAL FEATURES

Nominal Impulse Voltage	8 Kv
-------------------------	-------------

Nominal Current	76 A
Nominal Voltage	1000 V
Maximum Load Current	101 A

CONNECTION DATA

Connection Type	Vidali Baglanti
Single-core min. conductor cross-section	1,5 mm²
Single-core max. conductor cross-section	25 mm²
Conductor Cross Section Awgkcmil Min	16 AWG
Conductor Cross Section Awgkcmil Max	4 AWG
Multi-core min. conductor cross-section	1,5 mm²
Multi-core max. conductor cross-section	25 mm²
Multi-core min. conductor cross-section with ferrule	1,5 mm²
Multi-core max. conductor cross-section with ferrule	16 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	0,75 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	10 mm²
Min. Stripping Length	12 mm
Max. Stripping Length	14 mm
Internal cylindrical indicator	B7
Tightening Torque Min	1,2 Nm
Tightening Torque Max	2 Nm

DIMENSIONS

Width	12 mm
Length	52,80 mm
Height Mr 35X75	58,60 mm
Height MR 35x15	63,20 mm