


КЛЕММНЫЕ БЛОКИ > ВИНТОВЫЕ КЛЕММНЫЕ БЛОКИ > ПРОХОДНЫЕ КЛЕММЫ

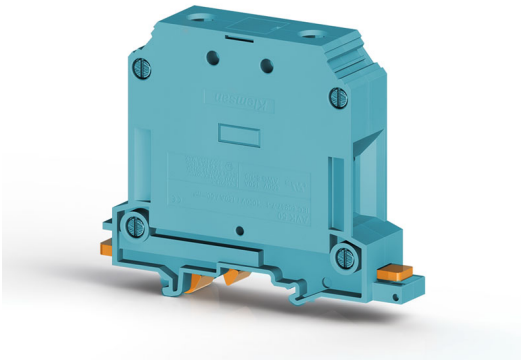

AVK 50 СИНИЙ

Артикул (SKU): 304331

Переходная клеммная колодка винтовая 50 мм², высокая мощность

Коммерческая информация

Код продажи продукта	304331
Единица Упаковки	25 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.11828 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	2
Color	Mavi
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C
ELECTRICAL FEATURES	
Nominal Impulse Voltage	8 Kv

Nominal Current	150 A
Nominal Voltage	1000 V
Maximum Load Current	192 A

CONNECTION DATA

Connection Type	Vidali Baglanti
Single-core min. conductor cross-section	16 mm²
Single-core max. conductor cross-section	70 mm²
Conductor Cross Section Awgkcmil Min	10 AWG
Conductor Cross Section Awgkcmil Max	Jan-00 AWG
Multi-core min. conductor cross-section	25 mm²
Multi-core max. conductor cross-section	50 mm²
Multi-core min. conductor cross-section with ferrule	25 mm²
Multi-core max. conductor cross-section with ferrule	50 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	10 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	16 mm²
Min. Stripping Length	22 mm
Max. Stripping Length	24 mm
Internal cylindrical indicator	B10
Tightening Torque Min	6 Nm
Tightening Torque Max	10 Nm

DIMENSIONS

Width	20 mm
Length	95,20 mm
Height Mr 35X75	77 mm
Height MR 35x15	84,50 mm
Height Mr 32	81,60 mm