


КЛЕММНЫЕ БЛОКИ > ВИНТОВЫЕ КЛЕММНЫЕ БЛОКИ > ПРОХОДНЫЕ КЛЕММЫ

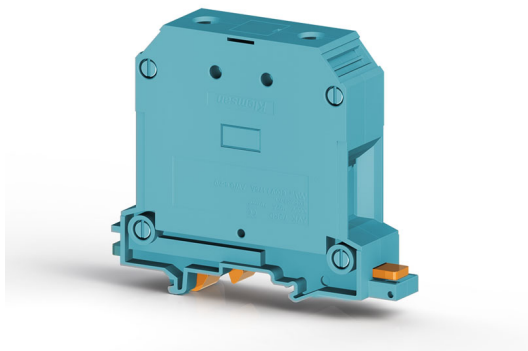

AVK 70RD СИНИЙ

Артикул (SKU): 304491

Переходная клеммная колодка винтовая 70 мм², высокая мощность

Коммерческая информация

Код продажи продукта	304491
Единица Упаковки	10 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.148 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	2
Color	Mavi
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

ELECTRICAL FEATURES	
Nominal Impulse Voltage	8 Kv

Nominal Current	192 A
Nominal Voltage	1000 V
Maximum Load Current	192 A

CONNECTION DATA

Connection Type	Vidali Baglanti
Single-core min. conductor cross-section	16 mm²
Single-core max. conductor cross-section	70 mm²
Conductor Cross Section Awgkcmil Min	6 AWG
Conductor Cross Section Awgkcmil Max	Feb-00 AWG
Multi-core min. conductor cross-section	16 mm²
Multi-core max. conductor cross-section	70 mm²
Multi-core min. conductor cross-section with ferrule	16 mm²
Multi-core max. conductor cross-section with ferrule	70 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	16 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	25 mm²
Min. Stripping Length	22 mm
Max. Stripping Length	24 mm
Internal cylindrical indicator	A11
Tightening Torque Min	6 Nm
Tightening Torque Max	12 Nm

DIMENSIONS

Width	22 mm
Length	94,60 mm
Height Mr 35X75	81 mm
Height MR 35x15	88,5 mm
Height Mr 32	85,60 mm