


КЛЕММНЫЕ БЛОКИ > ПРОЧИЕ ПРОДУКТЫ > КЛЕММНЫЕ БЛОКИ

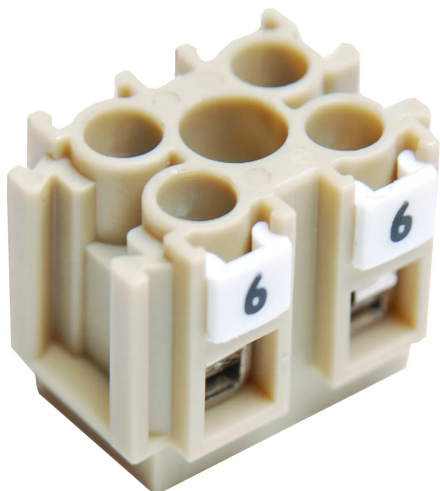

PSK 1/2 Бежевый

Артикул (SKU): 420020

Клеммная колодка 4 мм², 4-полюсная, винтовая

Коммерческая информация

| | |
|----------------------------------|---------------------|
| Код продажи продукта | 420020 |
| Единица Упаковки | 100 шт. |
| Номер таможенного тарифа | 853690950000 |
| Вес за единицу, включая упаковку | 0.00663 kg. |

Техническая информация

| PRODUCT FEATURES | |
|---------------------------------------|----------------------|
| Number of Connections | 4 |
| Color | Beige |
| Number of Levels | 2 |
| Insulation Material | PA |
| UL 94 Flammability Class | V2 |
| Impulse Voltage Category | III |
| Insulation Material Group | I |
| Pollution Degree | 3 |
| Connection According to Standard | IEC 60998-2-1 |
| Continuous Operating Temperature max. | 120 °C |
| Continuous Operating Temperature min. | -55 °C |

ELECTRICAL FEATURES

| | |
|-------------------------|--------------|
| Nominal Impulse Voltage | 3 Kv |
| Nominal Current | 24 A |
| Nominal Voltage | 400 V |

CONNECTION DATA

| | |
|--|----------------------------|
| Connection Type | Screw Connection |
| Single-core min. conductor cross-section | 0,2 mm² |
| Single-core max. conductor cross-section | 4 mm² |
| Conductor Cross Section Awgkcmil Min | 24 AWG |
| Conductor Cross Section Awgkcmil Max | 12 AWG |
| Multi-core min. conductor cross-section | 0,2 mm² |
| Multi-core max. conductor cross-section | 4 mm² |
| Multi-core min. conductor cross-section with ferrule | 0,25 mm² |
| Multi-core max. conductor cross-section with ferrule | 2,5 mm² |
| Min. Stripping Length | 5 mm |
| Max. Stripping Length | 6 mm |
| Internal cylindrical indicator | A3 |
| Tightening Torque Min | 0,4 Nm |
| Tightening Torque Max | 0,6 Nm |

DIMENSIONS

| | |
|--------|-----------------|
| Width | 21,60 mm |
| Length | 14,80 mm |
| Height | 18 mm |