


КЛЕММНЫЕ БЛОКИ > ПРУЖИННЫЕ КЛЕММНЫЕ БЛОКИ > ЗАЗЕМЛЯЮЩИЕ КЛЕММЫ

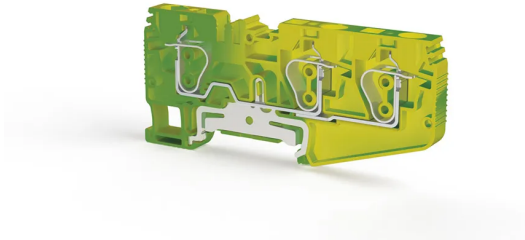

SRD 6ET Жёлто-зелёный

Артикул (SKU): 337220

Клеммная колодка заземления Cage Clamp, 6 мм² 1 вход - 2 выхода

Коммерческая информация

Код продажи продукта	337220
Единица Упаковки	50 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.0312 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	3
Color	Yellow/Green
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V0
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Protective Conductor Type	PE
Connection According to Standard	IEC 60947-7-2
Fire Protection In Railway Vehicles Din En 45545 2 R22 R23 R24 R26	HL 1 - HL 2 - HL 3
Continuous Operating Temperature max.	130 °C

Continuous Operating Temperature min.	-60 °C
---------------------------------------	---------------

ELECTRICAL FEATURES

Nominal Impulse Voltage	8 Kv
-------------------------	-------------

CONNECTION DATA

Connection Type	Spring Connection
-----------------	--------------------------

Single-core min. conductor cross-section	0,2 mm²
--	---------------------------

Single-core max. conductor cross-section	10 mm²
--	--------------------------

Conductor Cross Section Awgkcmil Min	24 AWG
--------------------------------------	---------------

Conductor Cross Section Awgkcmil Max	8 AWG
--------------------------------------	--------------

Multi-core min. conductor cross-section	0,2 mm²
---	---------------------------

Multi-core max. conductor cross-section	6 mm²
---	-------------------------

Multi-core min. conductor cross-section with ferrule	0,25 mm²
--	----------------------------

Multi-core max. conductor cross-section with ferrule	6 mm²
--	-------------------------

2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	1,5 mm²
--	---------------------------

Min. Stripping Length	10 mm
-----------------------	--------------

Max. Stripping Length	12 mm
-----------------------	--------------

Internal cylindrical indicator	A5
--------------------------------	-----------

DIMENSIONS

Width	8,00 mm
-------	----------------

Length	96,80 mm
--------	-----------------

Height Mr 35X75	44,10 mm
-----------------	-----------------

Height MR 35x15	51,60 mm
-----------------	-----------------