


КЛЕММНЫЕ БЛОКИ > ПРУЖИННЫЕ КЛЕММНЫЕ БЛОКИ > ЗАЗЕМЛЯЮЩИЕ КЛЕММЫ

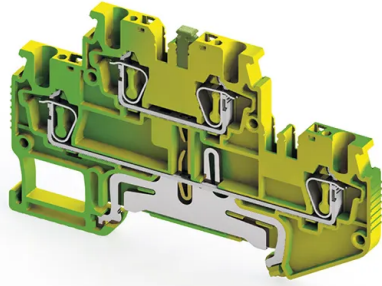

## SRD 1,5\_2T Жёлто-зелёный

Артикул (SKU): 337110

Клеммная колодка заземления Cage Clamp, 1,5 мм<sup>2</sup>, 2-слойная, 4-полюсная

### Коммерческая информация

Код продажи продукта	<b>337110</b>
Единица Упаковки	<b>50 шт.</b>
Номер таможенного тарифа	<b>853690950000</b>
Вес за единицу, включая упаковку	<b>0.014 kg.</b>

### Техническая информация

PRODUCT FEATURES	
Number of Connections	<b>4</b>
Color	<b>Yellow/Green</b>
Number of Levels	<b>2</b>
Protective Conductor Type	<b>PE</b>
Insulation Material	<b>PA</b>
UL 94 Flammability Class	<b>V0</b>
Impulse Voltage Category	<b>III</b>
Insulation Material Group	<b>I</b>
Pollution Degree	<b>3</b>
Connection According to Standard	<b>IEC 60947-7-2</b>
Fire Protection In Railway Vehicles Din En 45545 2 R22 R23 R24 R26	<b>HL 1 - HL 2 - HL 3</b>
Continuous Operating Temperature max.	<b>130 °C</b>

Continuous Operating Temperature min.	<b>-60 °C</b>
---------------------------------------	---------------

## ELECTRICAL FEATURES

Nominal Impulse Voltage	<b>6 Kv</b>
-------------------------	-------------

## CONNECTION DATA

Connection Type	<b>Spring Connection</b>
-----------------	--------------------------

Single-core min. conductor cross-section	<b>0,08 mm<sup>2</sup></b>
--	----------------------------

Single-core max. conductor cross-section	<b>1,5 mm<sup>2</sup></b>
--	---------------------------

Conductor Cross Section Awgkcmil Min	<b>28 AWG</b>
--------------------------------------	---------------

Conductor Cross Section Awgkcmil Max	<b>16 AWG</b>
--------------------------------------	---------------

Multi-core min. conductor cross-section	<b>0,08 mm<sup>2</sup></b>
---	----------------------------

Multi-core max. conductor cross-section	<b>1,5 mm<sup>2</sup></b>
---	---------------------------

Multi-core min. conductor cross-section with ferrule	<b>0,14 mm<sup>2</sup></b>
--	----------------------------

Multi-core max. conductor cross-section with ferrule	<b>1,5 mm<sup>2</sup></b>
--	---------------------------

2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	<b>0,5 mm<sup>2</sup></b>
--	---------------------------

Min. Stripping Length	<b>8 mm</b>
-----------------------	-------------

Max. Stripping Length	<b>10 mm</b>
-----------------------	--------------

Internal cylindrical indicator	<b>A1</b>
--------------------------------	-----------

## DIMENSIONS

Width	<b>4,2 mm</b>
-------	---------------

Length	<b>79,80 mm</b>
--------	-----------------

Height Mr 35X75	<b>50,30 mm</b>
-----------------	-----------------

Height MR 35x15	<b>57,80 mm</b>
-----------------	-----------------