


ЭЛЕКТРОННАЯ ПРОДУКЦИЯ > РЕЛЕ ПЛК > ИНТЕГРИРОВАННЫЕ РЕЛЕ ПЛК

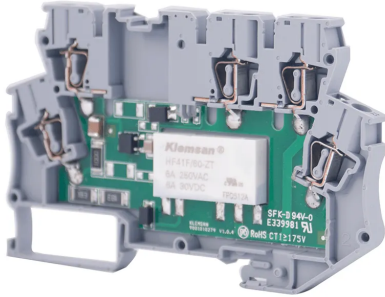

KPR-CIE-48VAC/DC-1C

Артикул (SKU): 271530

Интегрированный интерфейсный релейный модуль

Коммерческая информация

| | |
|----------------------------------|---------------------|
| Код продажи продукта | 271530 |
| Единица Упаковки | 10 шт. |
| Номер таможенного тарифа | 853641900000 |
| Вес за единицу, включая упаковку | 26 kg. |

Техническая информация

| General | |
|---------------------------|-------------------------------------|
| Connection Type | Cage Clamp |
| Protection Class | IP20 |
| Weight G | 26 |
| Packaging Quantity | 10 |
| Diagrams | --- |
| DIMENSIONS | --- |
| Case Width Mm | 6,2 |
| Mounting Type | Rail Mount |
| Max Cable Cross Section | 2,5 |
| Max Torque | 0,4Nm |
| Insulation Resistance | 1000M Ohm (500VDC) |
| Current Measurement Input | |
| Power Consumption | <0.35VA AC / <0.35W DC |

| | |
|-------------------------|-----------------|
| Nominal Voltage Un | 48VAC/DC |
| Operating Voltage Range | 0,8 x Un |
| Isolation Voltage | 0,2 x Un |
| Integrated Rcz Filter | + |

Environmental Conditions

| | |
|----------------------------------|-----------------------------------|
| Operating Temperature | -40°C +85°C |
| Storage Temperature | -40°C +85°C |
| Relative Humidity Non Condensing | %5 .. %85 (non-condensing) |

Connection Information

| | |
|--|------------------------------------|
| Connection Type | 1 C/O |
| Material | AgSnO2 |
| Coil Voltage | 24VDC |
| Coil Impedance | 147x(1± 10%) Ohm |
| Coil Consumption | 170mW |
| Operating Time | 10 ms max. |
| Release Time | 5 ms max. |
| Max Values Ac | 6A/250VAC; 1500VA |
| Max Values Dc | 6A/30VDC; 180W |
| Mechanical Operating Life No | 3x10⁷ operations |
| Electrical Operating Life UI Approved 85C No | 3x10⁴ operations |
| Electrical Operating Life UI Approved 85C Nc | 1x10⁴ operations |

Dielectric Strength

| | |
|---------------------------------|-----------------------|
| Connections Between Relay Coils | 4000VAC 1 min. |
| Connections Between | 1000VAC 1 min. |