


ЭЛЕКТРОННАЯ ПРОДУКЦИЯ > РЕЛЕ ПЛК > ИНТЕГРИРОВАННЫЕ РЕЛЕ ПЛК

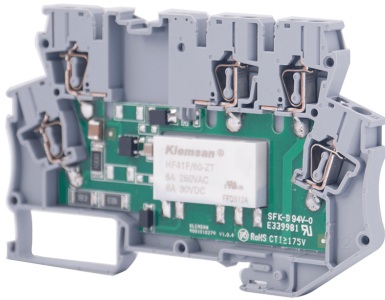

KPR-CIF-115VAC/ DC-1C

Артикул (SKU): 271556

Интегрированный интерфейсный релейный модуль

Коммерческая информация

Код продажи продукта	271556
Единица Упаковки	10 шт.
Номер таможенного тарифа	853649000029
Вес за единицу, включая упаковку	0.026 kg.

Техническая информация

General	
Connection Type	Cage Clamp
Protection Class	IP20
Weight G	26
Packaging Quantity	10
Diagrams	---
DIMENSIONS	---
Case Width Mm	6,2
Mounting Type	Rail Mount
Max Cable Cross Section	2,5
Max Torque	0,4Nm
Insulation Resistance	1000M Ohm (500VDC)
Current Measurement Input	
Power Consumption	<0.35VA AC / <0.35W DC

Nominal Voltage Un	115VAC/DC
Operating Voltage Range	0,8 x Un
Isolation Voltage	0,2 x Un
Integrated Rcz Filter	+

Environmental Conditions

Operating Temperature	-40°C +85°C
Storage Temperature	-40°C +85°C
Relative Humidity Non Condensing	%5 .. %85 (non-condensing)

Connection Information

Connection Type	1 C/O
Material	AgSnO2
Coil Voltage	60VDC
Coil Impedance	147x(1± 10%) Ohm
Coil Consumption	170mW
Operating Time	10 ms max.
Release Time	5 ms max.
Max Values Ac	6A/250VAC; 1500VA
Max Values Dc	6A/30VDC; 180W
Mechanical Operating Life No	3x10⁷ operations
Electrical Operating Life UI Approved 85C No	3x10⁴ operations
Electrical Operating Life UI Approved 85C Nc	1x10⁴ operations

Dielectric Strength

Connections Between Relay Coils	4000VAC 1 min.
Connections Between	1000VAC 1 min.