


КЛЕММНЫЕ БЛОКИ > ВИНТОВЫЕ КЛЕММНЫЕ БЛОКИ > ПРОХОДНЫЕ КЛЕММЫ

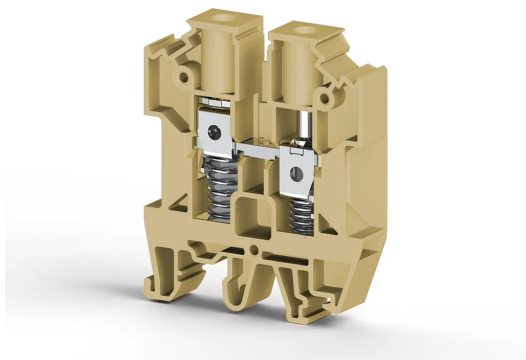

AVK Y10 Beige - AVK Y10

Бежевый

Артикул (SKU): 304529

Сквозная клеммная колодка Cage Clamp, 10 мм², винт/пружина

Коммерческая информация

Код продажи продукта	304529
Единица Упаковки	70 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.0217142 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	2
Color	Beige
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C
ELECTRICAL FEATURES	
Nominal Impulse Voltage	8 Kv

Nominal Current	57 A
Nominal Voltage	800 V
Maximum Load Current	76 A

CONNECTION DATA

Connection Type	Screw Connection
Single-core min. conductor cross-section	0,5 mm²
Single-core max. conductor cross-section	16 mm²
Conductor Cross Section Awgkcmil Min	20 AWG
Conductor Cross Section Awgkcmil Max	6 AWG
Multi-core min. conductor cross-section	0,5 mm²
Multi-core max. conductor cross-section	16 mm²
Multi-core min. conductor cross-section with ferrule	0,5 mm²
Multi-core max. conductor cross-section with ferrule	10 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	0,5 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	6 mm²
Min. Stripping Length	10 mm
Max. Stripping Length	12 mm
Internal cylindrical indicator	B6
Tightening Torque Min	1,2 Nm
Tightening Torque Max	1,8 Nm

DIMENSIONS

Width	10,00 mm
Length	49,40 mm
Height Mr 35X75	59,20 mm
Height MR 35x15	66,70 mm
Height Mr 32	63,80 mm