


КЛЕММНЫЕ БЛОКИ > КЛЕММНЫЕ КОЛОДКИ С ВСТАВНЫМ КРЕПЛЕНИЕМ > МНОГОУРОВНЕВЫЕ КЛЕММЫ

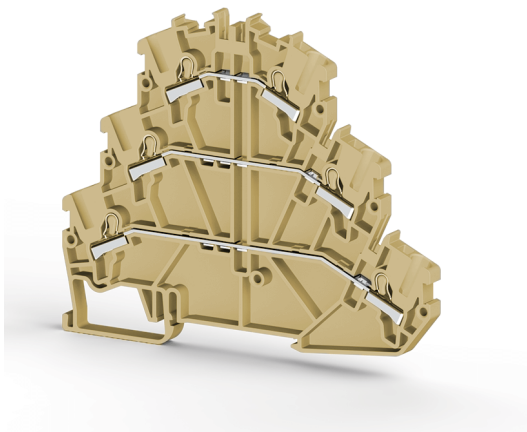

РҮК 2,5-3F Бежевый

Артикул (SKU): 307190

Клеммная колодка push-in, 2,5 мм² 3-слойная проходная (бежевый)

Коммерческая информация

Код продажи продукта	307190
Единица Упаковки	30 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.0214 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	6
Color	Beige
Number of Levels	3
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC-60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

ELECTRICAL FEATURES

Nominal Impulse Voltage	6 Kv
Nominal Current	24 A
Nominal Voltage	500 V
Maximum Load Current	32 A

CONNECTION DATA

Connection Type	Push-In Connection
Single-core min. conductor cross-section	0,34 mm²
Single-core max. conductor cross-section	4 mm²
Conductor Cross Section Awgkcmil Min	22 AWG
Conductor Cross Section Awgkcmil Max	12 AWG
Multi-core min. conductor cross-section	0,34 mm²
Multi-core max. conductor cross-section	2,5 mm²
Multi-core min. conductor cross-section with ferrule	0,25 mm²
Multi-core max. conductor cross-section with ferrule	2,5 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	0,5 mm²
Min. Stripping Length	9 mm
Max. Stripping Length	10 mm
Internal cylindrical indicator	A3

DIMENSIONS

Width	5 mm
Length	98,7 mm
Height Mr 35X75	83,1 mm
Height MR 35x15	90,6 mm