


КЛЕММНЫЕ БЛОКИ > ВИНТОВЫЕ КЛЕММНЫЕ БЛОКИ > ПРОХОДНЫЕ КЛЕММЫ

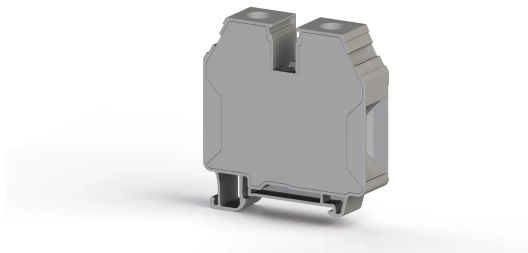

AVK 35 IRDS Серый

Артикул (SKU): 304590

Винтовая проходная клемма 35 мм² с шестигранником (серая)

Коммерческая информация

Код продажи продукта	304590
Единица Упаковки	50 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.06968 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	2
Color	Grey
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

ELECTRICAL FEATURES	
Nominal Impulse Voltage	8 Kv
Nominal Current	125 A

Nominal Voltage	1000 V
Maximum Load Current	125 A

CONNECTION DATA

Connection Type	Screw Connection
Single-core min. conductor cross-section	6 mm²
Single-core max. conductor cross-section	50 mm²
Conductor Cross Section Awgkcmil Min	10 AWG
Conductor Cross Section Awgkcmil Max	2 AWG
Multi-core min. conductor cross-section	6 mm²
Multi-core max. conductor cross-section	35 mm²
Multi-core min. conductor cross-section with ferrule	6 mm²
Multi-core max. conductor cross-section with ferrule	35 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Min	4 mm²
2 Conductors Of The Same Cross Section Multi Core Twin Ferrule With Plastic Sleeve Max	16 mm²
Min. Stripping Length	16 mm
Max. Stripping Length	18 mm
Internal cylindrical indicator	B9
Tightening Torque Min	4 Nm
Tightening Torque Max	6 Nm

DIMENSIONS

Width	16 mm
Length	62 mm
Height Mr 35X75	68 mm
Height MR 35x15	75,50 mm