


КЛЕММНЫЕ БЛОКИ > БОЛТОВЫЕ КЛЕММНЫЕ БЛОКИ > ПРОХОДНЫЕ КЛЕММЫ

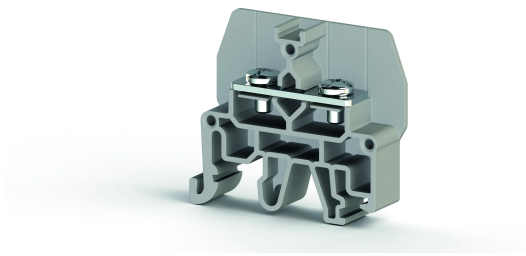

## CPB 6 Серый

Артикул (SKU): 326809

Вилочная вставная клемма 6 мм<sup>2</sup>, 1 вход-1 выход

### Коммерческая информация

|                                  |                     |
|----------------------------------|---------------------|
| Код продажи продукта             | <b>326809</b>       |
| Единица Упаковки                 | <b>50 ad шт.</b>    |
| Номер таможенного тарифа         | <b>853690950000</b> |
| Вес за единицу, включая упаковку | <b>0.0088 kg.</b>   |

### Техническая информация

| PRODUCT FEATURES                      |                      |
|---------------------------------------|----------------------|
| Number of Connections                 | <b>2</b>             |
| Color                                 | <b>Grey</b>          |
| Number of Levels                      | <b>1</b>             |
| Insulation Material                   | <b>PA</b>            |
| UL 94 Flammability Class              | <b>V2</b>            |
| Impulse Voltage Category              | <b>3</b>             |
| Insulation Material Group             | <b>1</b>             |
| Pollution Degree                      | <b>3</b>             |
| Connection According to Standard      | <b>IEC 60947-7-1</b> |
| Continuous Operating Temperature max. | <b>120 °C</b>        |
| Continuous Operating Temperature min. | <b>-55 °C</b>        |
| ELECTRICAL FEATURES                   |                      |
| Nominal Impulse Voltage               | <b>8 Kv</b>          |
| Nominal Current                       | <b>41 A</b>          |

|                 |              |
|-----------------|--------------|
| Nominal Voltage | <b>800 V</b> |
|-----------------|--------------|

## CONNECTION DATA

|  |  |
|--|--|
| Connection Type                          | <b>Civata baglanti / Bolt connection</b> |
| Single-core min. conductor cross-section | <b>0,5 mm<sup>2</sup></b>                |
| Single-core max. conductor cross-section | <b>10 mm<sup>2</sup></b>                 |
| Conductor Cross Section Awgkcmil Min     | <b>20 AWG</b>                            |
| Conductor Cross Section Awgkcmil Max     | <b>10 AWG</b>                            |
| Multi-core min. conductor cross-section  | <b>0,5 mm<sup>2</sup></b>                |
| Multi-core max. conductor cross-section  | <b>6 mm<sup>2</sup></b>                  |
| Tightening Torque Min                    | <b>0,8 Nm</b>                            |
| Tightening Torque Max                    | <b>1,2 Nm</b>                            |

## DIMENSIONS

|                 |                 |
|-----------------|-----------------|
| Width           | <b>9,50 mm</b>  |
| Length          | <b>42,80 mm</b> |
| Height Mr 35X75 | <b>38,50 mm</b> |
| Height MR 35x15 | <b>46,00 mm</b> |
| Height Mr 32    | <b>43,10 mm</b> |