

Unmanaged 8 x 10/100 RJ45 Industrial Switch

Description

The KIES-108A is an unmanaged industrial fast ethernet switch featuring 8 independent 10/100Base-TX ports designed for automation application networks to deliver unrivalled performance. Switch is built with rugged, hardened case and components able to withstand a high degree of vibration and shock and an operating temperature from -40°C to 75°C. The KIES-108A is engineered and designed especially for harsh and extreme industrial type applications. With its hardened case and high performance components, the KIES-108A is an ideal solution for your extreme industrial automation environment. The DIN-Rail mounting capability which is already attached, wide operating temperature and the IP30 housing with LED indicators make the plug-and-play KIES-108A switches easy to use and reliable for deployment even in harsh environments and easy way with no configuration required.

Features Highlight

Robust Performance and Protection

With IP30 metal case, surge protection, power voltage drop alarm, and ESD protection, the KIES-108A provides a high level of immunity against electromagnetic interference and heavy electrical surges which are easy to deploy in industrial environments. Furthermore, the KIES-108A offers high performance switch architecture with 8 ports of 10/100Based-TX to meet the requirements of high-bandwidth access Ethernet, Fast Ethernet in tough operating temperatures.

Simplified Installation w/ Compact Size


The KIES-108A provides varied choice of deployment locations even in small places, harsh environments with its Din-Rail options in a quick and easy way by its compact size and no configuration required. Every KIES-108A is equipped with auto negotiation and auto MDI/MDI-X on all ports for simple connection to other switches and hubs. With diagnostic LEDs panel, the KIES-108A allows you to know the switch status and simplify troubleshooting.

Broadcast Storm

Broadcast storm control prevents excessive traffic on a LAN from being disrupted by a broadcast storm on a port. By enabling it allows you to monitor the traffic levels of the incoming broadcast packet rate and limits over an interval of time further drop excess packets. It prevents unnecessary extreme traffic and improves network performance.

Applications

The KIES-108A is compatible with 10/100Mbps through RJ45 transceivers to guarantee a strong, stable connection of Ethernet, Fast Ethernet through RJ45 ports, as an ideal for deployment in multiple high-speed automation systems.

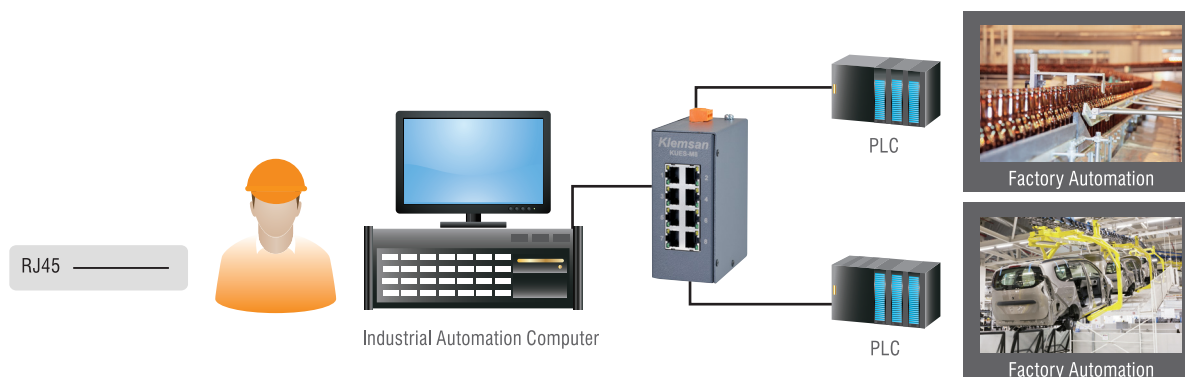

KUES-M8

Unmanaged 8 x 10/100 RJ45 Industrial Switch

Specifications

Interface

Ports 8 x 10/100Base-TX (RJ45)

Features

Performance Jumbo Frame Size: 1552 Bytes
 MAC Table size: 1K
 Throughput: 14,880 pps to 10 Mbps ports
 148,800 pps to 100 Mbps ports
 Switch Fabric: 1.6Gbps

QoS Broadcast storm protection for broadcast packet

Power

Input Voltage 12~48VDC, 0.2A max
 Connection Terminal block
 Power Consumption 3W(MAX)

Mechanical and Environment

Housing Metal (IP30 Protection)
 Mounting DIN-Rail
 Operating Temperature -40°C~75°C (-40°F~167°F)
 Storage Temperature -40°C~85°C (-40°F~185°F)
 Operating Humidity 5 to 95% RH (non-condensing)
 Storage Humidity 5 to 95% RH (non-condensing)
 Weight 435 g (1.0 lb)
 Dimension (WxHxD) 50.9 x 116 x 99.6 mm (2 x 4.5 x 3.9 in)

Standards and Certifications


CE	EMC	EN 55032
		EN 55035
		61000-6-2
		61000-6-4

Ordering Information

Stock Code	Product Name	Description
608351	KUES-M8	Unmanaged 8x10/100 RJ45 Industrial Switch

*Specifications subject to change without notice.

Dimension

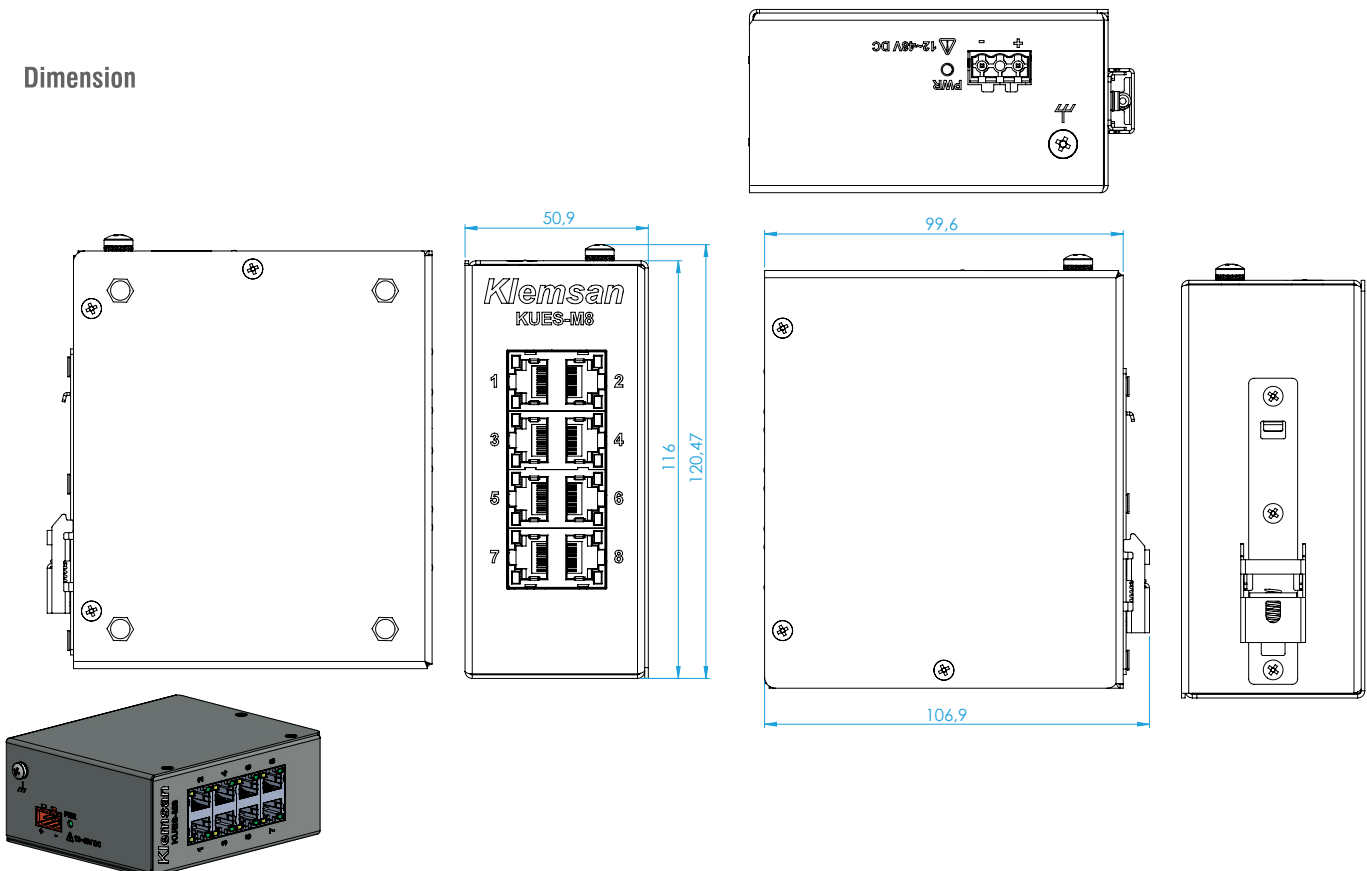

Revision No: 21062023

Klemsan[®]