


КЛЕММНЫЕ БЛОКИ > БОЛТОВЫЕ КЛЕММНЫЕ БЛОКИ > ПРОХОДНЫЕ КЛЕММЫ

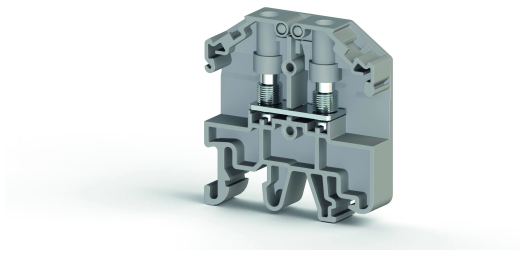

PB 2.5/NM Серый

Артикул (SKU): 308029

Кольцевая клемма, 2,5 мм² проходная (V0)

Коммерческая информация

Код продажи продукта	308029
Единица Упаковки	45 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.01 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	2
Color	Grey
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V0
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature max.	130 °C
Continuous Operating Temperature min.	-60 °C

ELECTRICAL FEATURES	
Nominal Impulse Voltage	8 Kv
Nominal Current	24 A

Nominal Voltage	800 V
-----------------	--------------

CONNECTION DATA

Connection Type	Bolt Connection
Single-core min. conductor cross-section	0,1 mm²
Single-core max. conductor cross-section	2,5 mm²
Conductor Cross Section Awgkcmil Min	26 AWG
Conductor Cross Section Awgkcmil Max	14 AWG
Multi-core min. conductor cross-section	0,1 mm²
Multi-core max. conductor cross-section	2,5 mm²
Tightening Torque Min	0,6 Nm
Tightening Torque Max	0,8 Nm
Hole Diameter Min	3,2 mm

DIMENSIONS

Width	9,00 mm
Length	44,70 mm
Height Mr 35X75	47,20 mm
Height MR 35x15	54,70 mm
Height Mr 32	51,80 mm