


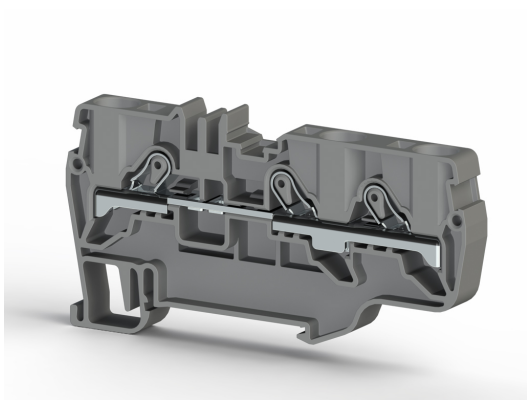

TERMINAL BLOCKS > PUSH-IN TYPE TERMINAL BLOCKS > MULTI-CONDUCTOR
TERMINAL BLOCKS

PYK 6E GREY

Stock Keeping Unit (SKU): 307639

6 mm² push-in three-pole terminal block

Commercial Information

Product Sales Code	307639
Package Unit	45 pcs.
Customs Tariff Number	853690950000
Weight Per Unit Including Packaging	0.019 kg.

Technical Information

PRODUCT SPECIFICATIONS	
Number of Connections	3
Number of Levels	1
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60947-7-1
Continuous Operating Temperature Max.	120 °C
Continuous Operating Temperature Min.	-55 °C
ELECTRICAL SPECIFICATIONS	
Nominal Impulse Voltage	8 Kv
Nominal Current	A

Nominal Voltage	1000 V
Maximum Load Current	57 A
Nominal Current (In / Fuse)	41 A

CONNECTION DATA

Connection Type	Push-In Connection
Min. Solid Conductor Cross-Sectional Area	0,5 mm²
Max. Solid Conductor Cross-Sectional Area	10 mm²
Conductor Cross-Section AWG/kcmil Min.	20 AWG
Conductor Cross-Section AWG/kcmil Max.	8 AWG

DIMENSIONS

Width	8 mm
Length	85,50 mm
Height MR 35x7.5	46,2 mm
Height MR 35x15	53,7 mm