


ЭЛЕКТРОННАЯ ПРОДУКЦИЯ > ДАТЧИКИ > ДАТЧИКИ ДЛЯ ПОМЕЩЕНИЙ

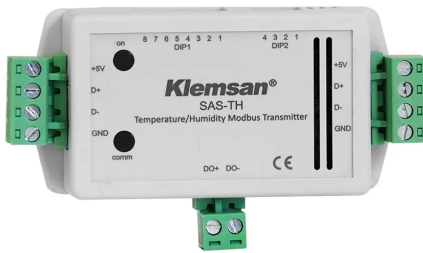

SAS-TH

Артикул (SKU): 604230

Датчик температуры и влажности

Коммерческая информация

Код продажи продукта	604230
Единица Упаковки	1 шт.

Техническая информация

General	
Connection Type	Wall Mount
DIMENSIONS	mm
Storage Temperature	-45°C .. 85°C
Digital Output	5 ... 30V DC; 50mA
Insulation	3750 VRMS
Power Supply	
Voltage	5 VDC ±10%
Frequency	
Environmental Conditions	
Operating Temperature	
Storage Temperature	
Relative Humidity Non Condensing	Max.95% (no condensation)
Degree Of Protection	IP20
Communication	

Protocol	Modbus RTU (RS 485)
Baud Rate	9600, 19200, 38400, 57600
Parity	None, Even
Stop Bit	1,2
Slave Id	1 .. 247

Measuring Range And Accuracy

Temperature Measuring Range	-40°C .. 80°C
Temperature Measuring Accuracy	±1°C
Dew Point Range	-40°C .. 80°C
Humidity Measuring Range	0%rH .. 100%rH
Humidity Measuring Accuracy	±3.5 % (20%rH- 80%rH)
Response Time	15 sn / sec
Atm Pressure Measuring Range	---
Atm Pressure Measuring Accuracy	---
Air Quality Index Range	---