


КЛЕММНЫЕ БЛОКИ > ПРОЧИЕ ПРОДУКТЫ > КЛЕММНЫЕ БЛОКИ

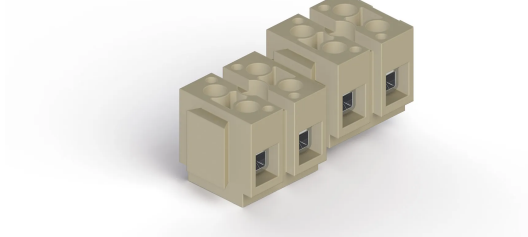

PSK 2/2 Бежевый

Артикул (SKU): 421020

Винтовая клеммная колодка 2,5 мм², 4-полюсная

Коммерческая информация

Код продажи продукта	421020
Единица Упаковки	100 шт.
Номер таможенного тарифа	853690950000
Вес за единицу, включая упаковку	0.01731 kg.

Техническая информация

PRODUCT FEATURES	
Number of Connections	4
Color	Beige
Number of Levels	2
Insulation Material	PA
UL 94 Flammability Class	V2
Impulse Voltage Category	III
Insulation Material Group	I
Pollution Degree	3
Connection According to Standard	IEC 60998-2-1
Continuous Operating Temperature max.	120 °C
Continuous Operating Temperature min.	-55 °C

ELECTRICAL FEATURES	
Nominal Impulse Voltage	6 Kv
Nominal Current	41 A

Nominal Voltage	600 V
-----------------	--------------

CONNECTION DATA

Connection Type	Screw Connection
Single-core min. conductor cross-section	0,2 mm²
Single-core max. conductor cross-section	10 mm²
Conductor Cross Section Awgkcmil Min	24 AWG
Conductor Cross Section Awgkcmil Max	8 AWG
Multi-core min. conductor cross-section	0,2 mm²
Multi-core max. conductor cross-section	10 mm²
Multi-core min. conductor cross-section with ferrule	0,25 mm²
Multi-core max. conductor cross-section with ferrule	6 mm²
Min. Stripping Length	8 mm
Max. Stripping Length	9 mm
Internal cylindrical indicator	B5
Tightening Torque Min	0.5 Nm
Tightening Torque Max	0.8 Nm

DIMENSIONS

Width	28,50 mm
Length	23 mm
Height	21,75 mm